

HYUNDAI XTeer 4T SN, JASO MB

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK

HYUNDAI XTeer

HYUNDAI XTeer Lubricants

ALWAYS MOVING TOGETHER

xteer.co.kr/eng

The Only One – Endorsed and recommended by HYUNDAI OILBANK



Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai's built-up technology will open the new world of Industrial lubricants.

HYUNDAI XTeer 4T SN, JASO MB is formulated with synthetic base oil and the latest additives technology meeting the requirement of current advanced engine oil grade of API SN and JASO MB. It is optimized to provide complete scooter engine oil performance especially for fuel economy, reducing friction loss.

** Oil recommendations differ per OEM brand. Check owner's manual before use.*



Performance levels

API SN
JASO MB
SAE 5W-40/10W-40




Features and benefits

Thermal Protection
Ultimate Durability
Power and Control
Emissions Conformity



Applications

All gasoline vehicles.
Four-stroke gasoline engine in motorcycles.
The vehicles which need the requirement of API SN oil.

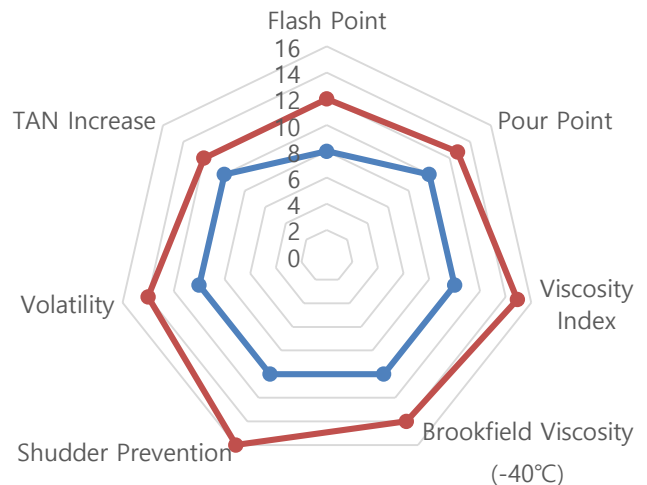

● Standard (API SN)

● XTeer 4T 7000

HYUNDAI XTeer 4T SN, JASO MB

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK



HYUNDAI XTeer Lubricants

ALWAYS MOVING TOGETHER


xteer.co.kr/eng

The Only One – Endorsed and recommended by HYUNDAI OILBANK



Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai's built-up technology will open the new world of Industrial lubricants.

SAE	Density	Kinematic Viscosity		Viscosity Index	Flash Point	Pour Point	C.C.S
		40°C	100°C				
5W-40	0.8738	164.0	18.35	125	256	-33.0	6,560 (@-25°C)
10W-40	0.8654	104.6	14.87	148	232	-39.0	5,808 (@-25°C)

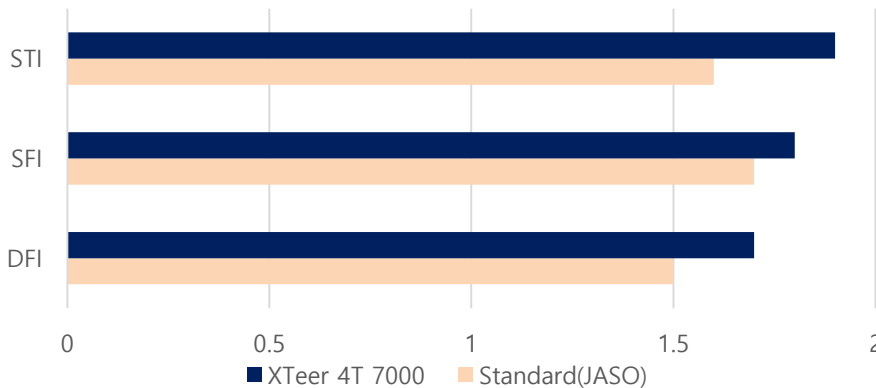

STI –Stop Time Index: how quickly the clutch engages
 SFI –Static Friction Index: torque required to cause clutch to slip when fully engaged
 DFI –Dynamic Friction Index: how the clutch engages when already spinning



XTeer 4T SN, JASO MB is The wide temperature range capability of the synthetic technology base fluid ensures correct oil viscosity which reduces friction at start-up, and provides maximum lubrication during high temperature operation.

* Oil recommendations differ per OEM brand. Check owner's manual before use.