

HYUNDAI XTeer 4T 5000

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK



HYUNDAI XTeer Lubricants

ALWAYS MOVING TOGETHER

<https://hyundaixteer.com/en>

The Only One – Endorsed and recommended by HYUNDAI OILBANK



Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai's built-up technology will open the new world of Industrial lubricants.

HYUNDAI XTeer 4T 5000 motorcycle engine oil contains a proprietary blend of high-quality base oils and advanced additive technology to help you achieve peak performance from your machine. Developed to protect engines and wet clutch systems in high RPM and high temperature conditions to maximize power and smooth shifting.

* Oil recommendations differ per OEM brand. Check owner's manual before use.



Performance levels

API SL

SAE 10W-40, 20W-40
20W-50, 25W-60




Features and benefits

Excellent sludge protection
Prevents engine leaks and high oil consumption
Outstanding wear protection
Maximum horsepower



Applications

All gasoline vehicles.
Four-stroke gasoline engine in motorcycles.
The vehicles which need the requirement of API SN oil.

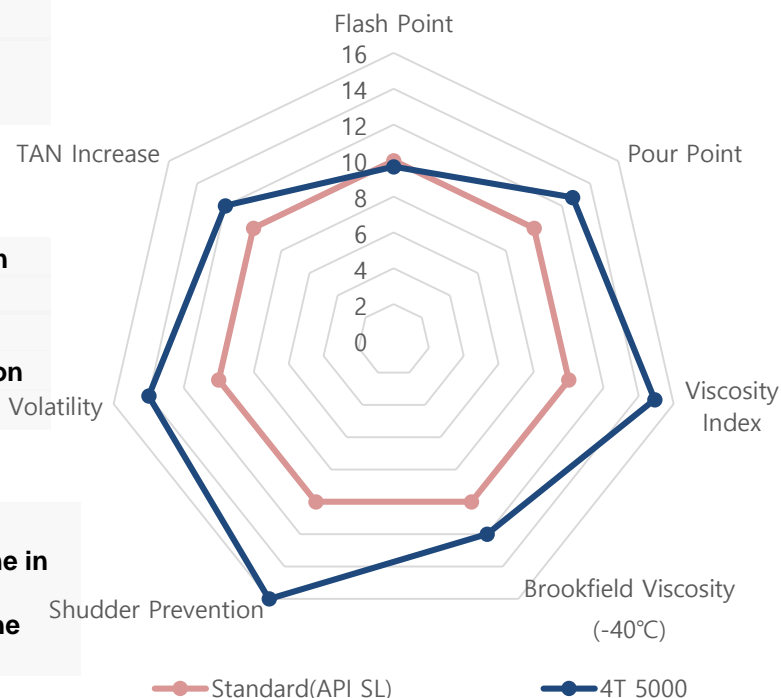

HYUNDAI XTeer 4T 5000

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK



HYUNDAI XTeer Lubricants
ALWAYS MOVING TOGETHER


<https://hyundaixteer.com/en>

The Only One – Endorsed and recommended by HYUNDAI OILBANK



Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai’s built-up technology will open the new world of Industrial lubricants.

SAE	Density	Kinematic Viscosity		Viscosity Index	Flash Point	Pour Point	C.C.S
		40°C	100°C				
10W-40	0.8648	95.4	13.6	144	232	-26.0	6,491 (@-25°C)
20W-40	0.8741	124.9	15.2	125	224	-30.0	6,700 (@-15°C)
20W-50	0.8735	160.6	18.1	125	225	-32.0	6,700 (@-15°C)
25W-60	0.8735	218	23.5	134	262	-32.0	5,800 (@-10°C)

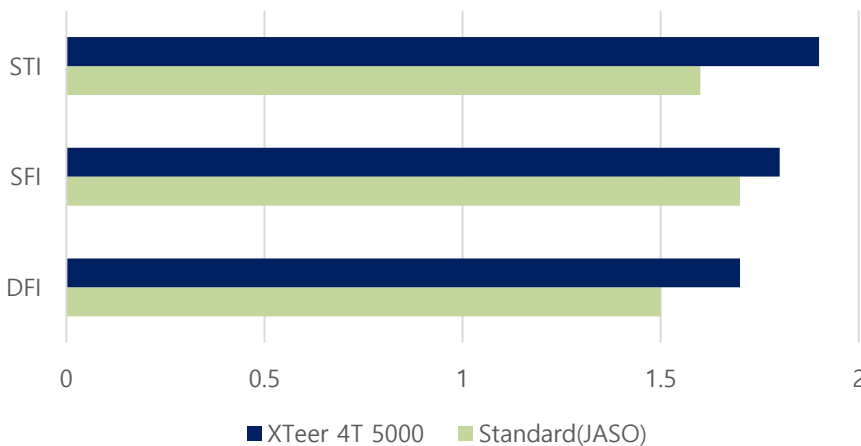

STI –Stop Time Index: how quickly the clutch engages
 SFI –Static Friction Index: torque required to cause clutch to slip when fully engaged
 DFI –Dynamic Friction Index: how the clutch engages when already spinning



XTeer 4T 5000 is formulated from Synthetic Technology meeting the requirement of current advanced top-tier engine oil grade of API SL. It is optimized to provide complete motorcycle engine oil performance especially for fuel efficiency, reducing friction loss and durability.

* Oil recommendations differ per OEM brand. Check owner’s manual before use.