

# HYUNDAI XTeer HD 8000

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK



## HYUNDAI XTeer Lubricants

ALWAYS MOVING TOGETHER

<https://hyundaixteer.com/en>


**The Only One – Endorsed and recommended by HYUNDAI OILBANK**



Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai's built-up technology will open the new world of Industrial lubricants.

HYUNDAI XTeer HD 8000 is synthetic, ultra-high performance diesel engine oil developed to lubricate modern, high-performance, low-emission engines operating in severe duty equipment. A new advanced additive system has been specially developed to help extend engine life and maintain the effectiveness of emission reduction systems, including diesel particulate filters (DPFs).

*\* Oil recommendations differ per OEM brand. Check owner's manual before use.*

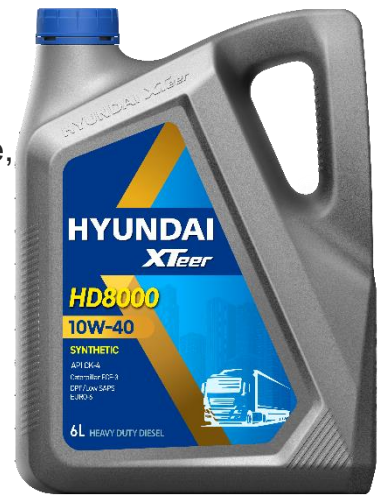


Performance levels

API CK-4  
Caterpillar ECF-3  
SAE 10W-40/15W-40




Features and benefits

Synthetic  
DPF/Low SAPS  
EURO-6  
Improved fuel efficiency



Applications

Diesel commercial vehicles with DPF, SCR, and EGR  
Heavy-duty diesel engines

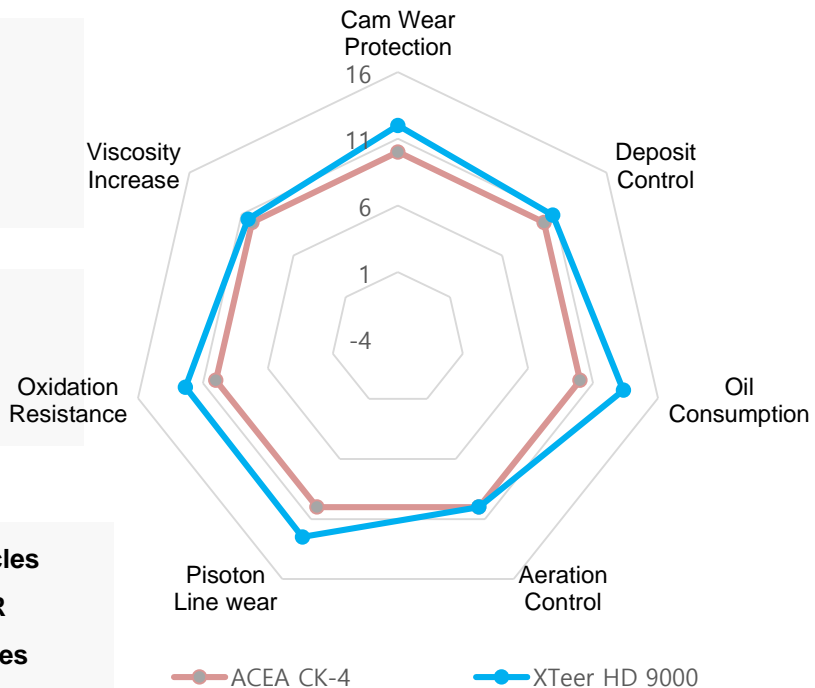

# HYUNDAI XTeer HD 8000

A PRODUCT OF HYUNDAI XTEER CONSUMER MARKETS, A COMMERCIAL UNIT OF HYUNDAI OILBANK



## HYUNDAI XTeer Lubricants

ALWAYS MOVING TOGETHER

<https://hyundaixteer.com/en>

**The Only One – Endorsed and recommended by HYUNDAI OILBANK**




Converging the best and the most optimal, with incomparable power, enhancing performance at an amazing rate, HYUNDAI XTeer created by Hyundai’s built-up technology will open the new world of Industrial lubricants.

SAE	Kinematic Viscosity		Viscosity Index	Flash Point	Pour Point	SAPS (wt%)
	40°C	100°C				
10W-40	100.6	14.37	147	220	-39.0	0.9
15W-40	116.9	15.1	135	228	-30.0	0.9

\* Most of the test results are similar in quality, but there may be some differences in results depending on Lot No and the additives of the formulation.

Oxidation Induction time (min)

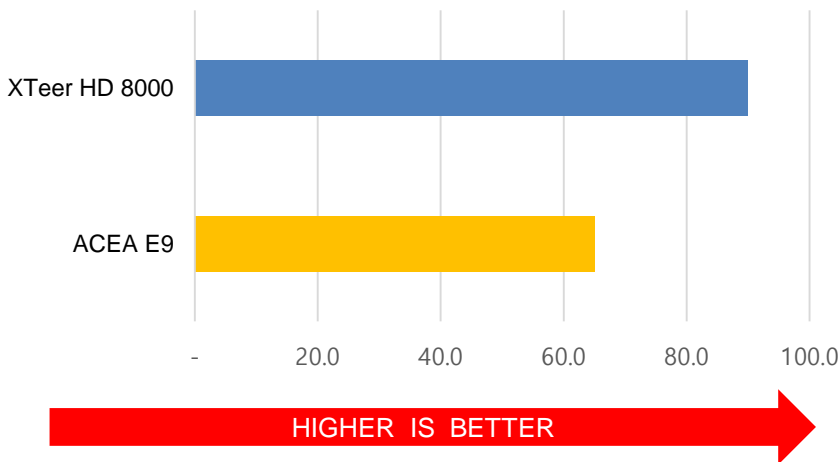

XTeer HD8000 meets the long oil drain requirements of Caterpillar, ACEA, API from the latest Euro-6 to older generation engines, to allow operators to optimize maintenance schedules and control maintenance costs. Unique additive technology delivers high levels of piston cleanliness essential for long engine life and wear protection.

\* Oil recommendations differ per OEM brand. Check owner’s manual before use.